

Fire-Ball® 300, 15:1

Air-Powered Grease Pumps and Packages

Features and Benefits

- Priming piston pump in combination with the appropriate feeding technology provides positive pump feeding, even with viscous and/or tacky greases
- Non-corrosive air motor design for long life
- Double-acting pump ensures smooth fluid flow
- Robust grease inlet cage withstands the most abusive handling

Typical Applications

- Medium pressure, low to medium volume grease dispense
- Automotive dealerships
- Heavy-duty dealerships
- Fast lube and service centers
- Fleet service facilities
- Lube trucks
- Mining
- In-plant

Typical Fluids Handled

- Grease up to NLGI #0



Technical Specifications

Continuous-Duty Flow Rate	0.7 gpm
Maximum Fluid Pressure	2700 psi (186 bar)
Air Motor Effective Diameter.....	3 in (7.6 cm)
Operating Range	40-180 psi (2.8-12.5 bar)
Approximate Air Use	17 cfm@ 100 psi (7 bar)
Wetted Materials	CS, AL, Leather, PTFE, Rubber
Air Inlet Port Size	3/8 in npt(f)
Material Inlet	1 in npt(f) Straight Inlet
Material Outlet.....	1/4 in npt(f)
Line Length‡	Up to 250 ft (76.2 m)
Dispense Points	1 to 2
Annual Usage	Up to 10,000 lb (4,535 kg)

Ordering Information

Fire-Ball 300 15:1 Pumps	
206405	35 lb (16 kg) Grease Pump - 15:1
206699	120 lb (55 kg) Grease Pump - 15:1
206700	400 lb (180 kg) Grease Pump - 15:1

Pump Performance

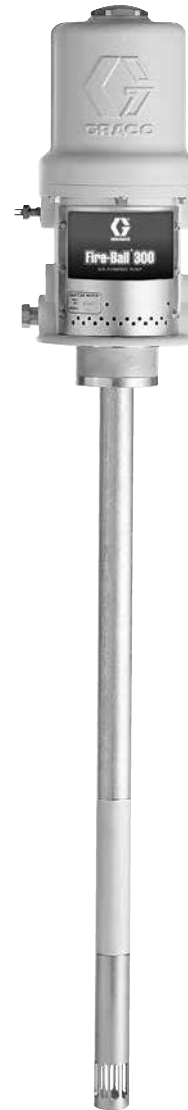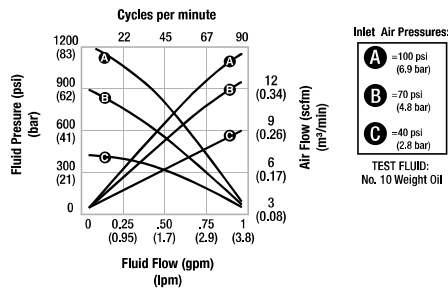

‡ Consult your local authorized Graco representative for line or pipe sizing