

A Complete Line of Pumps

APEX Oil Transfer Pumps

Graco's APEX transfer pumps are designed specifically to transfer bulk oils and hydraulic fluids anywhere. Larger horsepower motors offer flow rates up to 30 liter per minute (8 gallons).

- Available with 12 VDC, 115 VAC and 230 VAC electric motors
- TENV electric motor for demanding environments, models 260105, 260106, 260108 and 260109
- Self priming, positive displacement design
- Pumps petroleum and synthetic based lubricants up to 30 liter per minute (8 gallons)
- Built in bypass valve
- Transfer used oil with inlet suction screen (260306)
- System includes suction tube, fluid hose, dispense valve and bung adapter for models 260100, 260101, 260102 and 260104



APEX 115 VAC oil transfer system



APEX 115 VAC oil transfer pump


APEX On-Demand Dispensing Pumps

Keep air available for shop tools with this on-demand pump! With output up to 44 bar (650 psi) and 15 lpm (4 gpm), you can easily add oil dispense capabilities to your existing operation.

- Available in 12 VDC and 115 VAC
- On-demand pressure sensing system starts and stops the pump
- TENV electric motor for demanding environments
- Extremely quiet pump operation
- Output flow is continuous and non-pulsating
- Low operating and installation costs
- Inlet and outlet check valves with thermal relief valves included
- All units include bung adapter



APEX 12 volt DC on-demand dispensing pump

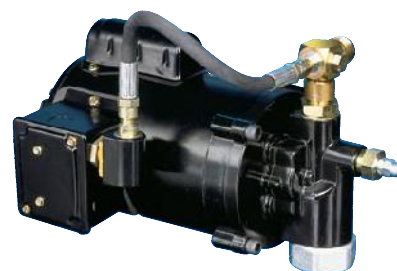

APEX 115 volt AC on-demand dispensing pump

Ordering Information

APEX Oil Transfer System



Part No.	260100	260101	260102*	260104
Motor	12 VDC	115 VAC	115 VAC	230 VAC
Hertz	NA	60 Hz	60 Hz	50/60 Hz
Horsepower	0.75	0.50	0.75	0.50
Max. current	35 A	9.2 A	9.2 A	4.0 A
Max. flow rate	22 lpm (5.8 gpm)	16 lpm (4.25 gpm)	30 lpm (8.0 gpm)	16 lpm (4.25 gpm)
Max. pressure	4.5 bar (65 psi)	4.5 bar (65 psi)	2.1 bar (30 psi)	4.5 bar (65 psi)
Inlet port	1 npt(f)	1 npt(f)	1 npt(f)	1 npt(f)
Outlet port	3/4 npt(f)	3/4 npt(f)	3/4 npt(f)	3/4 npt(f)
Weight	15 kg (34 lbs)	11 kg (25 lbs)	11 kg (25 lbs)	11 kg (25 lbs)
Instruction manual	311305	311305	311305	311305

Note: All oil transfer systems come with 3/4 in x 8 ft hose, 1 in x 3/4 in suction tube and 3/4 in outlet dispense valve

*Designed for fluid viscosities of 1000 centistokes or less. If fluid viscosity is greater than 1000 centistokes use part number 260101.

APEX Oil Transfer Pumps



Part No.	260105*	260106	260108	260109
Motor	115 VAC	115 VAC	115 VAC	115 VAC
Hertz	60 Hz	60 Hz	60 Hz	60 Hz
Horsepower	0.75	0.75	0.75	1.00
Max. current	7.5 A	7.5 A	9.0 A	11.0 A
Max. flow rate	11 lpm (3.0 gpm)	11 lpm (3.0 gpm)	15 lpm (4.0 gpm)	30 lpm (8.0 gpm)
Max. pressure	10 bar (150 psi)	10 bar (150 psi)	10 bar (150 psi)	10 bar (150 psi)
Inlet port	1 npt	1 npt	1 npt	1 npt
Outlet port	3/4 npt	3/4 npt	3/4 npt	3/4 npt
Weight	11 kg (25 lbs)	11 kg (25 lbs)	11 kg (25 lbs)	14 kg (30 lb)
Instruction manual	311306	311306	311306	311306

Note: All oil transfer pumps come with bung adapter.

*Part no. 260105 is a wall mount unit

APEX On-Demand Pumps



Part No.	260110	260111	260113	260114	260112
Voltage	115 VAC	115 VAC	115 VAC	115 VAC	12 VDC
Hertz	60 Hz	60 Hz	60 Hz	60 Hz	N/A
Horsepower	0.75	1.00	1.50	2.00	0.75
Max. current	10,6 A	13,6 A	18 A	21 A	62 A
Max. flow rate	9 lpm (2.3 gpm)	11 lpm (3 gpm)	16 lpm (4.0 gpm)	16 lpm (4.0 gpm)	11 lpm (3 gpm)
Max. pressure	25 bar (370 psi)	38 bar (550 psi)	32 bar (470 psi)	45 bar (650 psi)	28 bar (400 psi)
Inlet port	3/4 npt	3/4 npt	3/4 npt	3/4 npt	3/4 npt
Outlet port	-12 JIC (m)	-12 JIC (m)	-12 JIC (m)	-12 JIC (m)	-12 JIC (m)
Weight	12 kg (27 lb)	15 kg (32 lb)	19 kg (41 lb)	24 kg (52 lb)	12 kg (27 lb)
Instruction manual	311307	311307	311307	311307	311307

Note: All on-demand pumps come with bung adapter